


THE GSM EMBEDDED MODEM USER'S GUIDE ME40

Contents

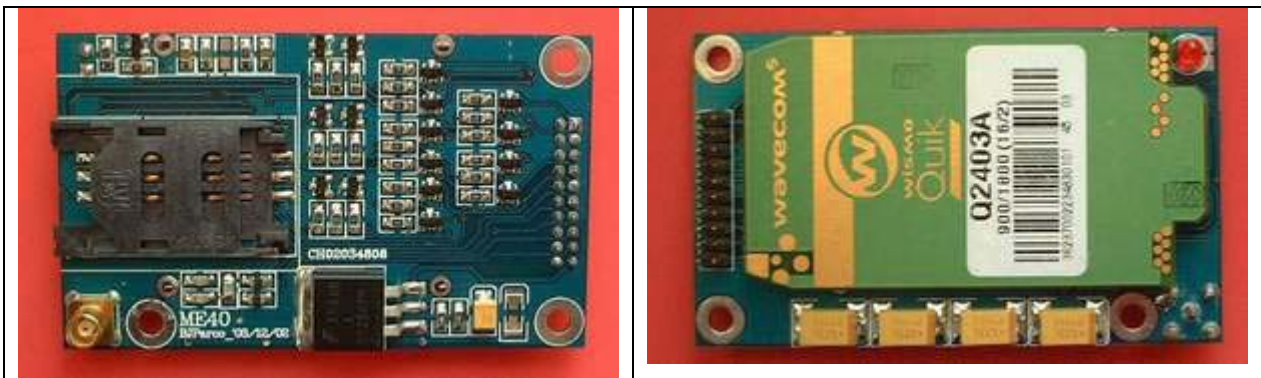

1 Introduction

- 1.1 Scope of this manual
- 1.2 Electrical characteristics
- 1.3 Mechanical characteristics
- 1.4 Features
 - 1.4.1 Telephony
 - 1.4.2 Short Message Service
 - 1.4.3 Data
 - 1.4.4 GSM Supplementary Service
 - 1.4.5 Others
- 1.5 Interfaces

2 Hardware Description

- 2.1 Overview
- 2.2 The 44 pin connector
- 2.3 Signal descriptions
 - 2.3.1 Power supply
 - 2.3.2 Serial link
 - 2.3.3 SIM interface
 - 2.3.4 LED
 - 2.3.5 Audio
 - 2.3.6 Control signals

3 The Optional RS232 Interface

- 3.1 Overview
- 3.2 Functional description
 - 3.2.1 The serial port connector

1 Introduction

The ME40 is designed to provide a quick and easy solution to systems that need to access GSM/GPRS network/functionality. The modem is full type approved and ready to use. It employs the proven GSM WISMO™ technology from WAVECOM.

1.1 Scope of this manual

This document describes the hardware interface and the technical specification of the ME40. For information about controlling the modem via the AT commands, refer to the 'AT command manual'.

1.2 Electrical characteristics

- Dual band GSM modem E-GSM 900/1800 or E-GSM 900/1900
- Class 4: 2W for GSM 900
- Class 1: 1W for GSM 1800/1900
- Voice, SMS, Fax and data
- Tricodec: Full Rate, Enhanced Full Rate and Half Rate
- 3V SIM interface
- Power supply: 5V @ 1A
- 300mA average current consumption
- 9mA in idle mode
- Operating temperature: -20°C to + 50°C
- Storage temperature: -35°C to +85°C

1.3 Mechanical characteristics

- **Small size: 68mm(L) x 41mm(W) x 10mm(H)**
- Mounting: 3 screw holes

1.4 Features

1.4.1 Telephony

- Telephony (TCH/FS) and Emergency calls
- Full Rate, Enhanced Full Rate and Half Rate
- DTMF functions

1.4.2 Short Message Service

- Point to Point MT and MO
- SMS Cell Broadcast

1.4.3 Data

- Data circuit asynchronous, transparent and non-transparent up to 14.4kbps
- Automatic fax group 3 (Class 1 and 2)
- Alternate speech and fax
- MNP2, V.42bis

1.4.4 GPRS packet data features

- GPRS class 2 / Class B
- Coding schemes CS1 to CS4
- Compliant with SMG31bis

1.4.5 GSM Supplementary Service

- Call Forwarding
- Call Barring
- Multi Party
- Call Waiting and Call Hold
- Calling Line Identity
- Advice of Charge
- USSD
- Closed User Group
- Explicit Call Transfer

1.4.6 Others

- ME + SIM phone book management
- Fixed Dialling Number
- SIM Toolkit Class 2
- SIM, network and service provider locks
- Real Time Clock
- Alarm management
- Software upgrade through Xmodem protocol
- UCS2 character set management

1.5 Interfaces

- Single Antenna Interface
- 3V only internal SIM interface
- 20-pin general purpose connector

2 Hardware Description

2.1 Overview

The ME40 includes a Wavcom Wismo2D module, 20-pin header, a SIM card holder, a RF connector.

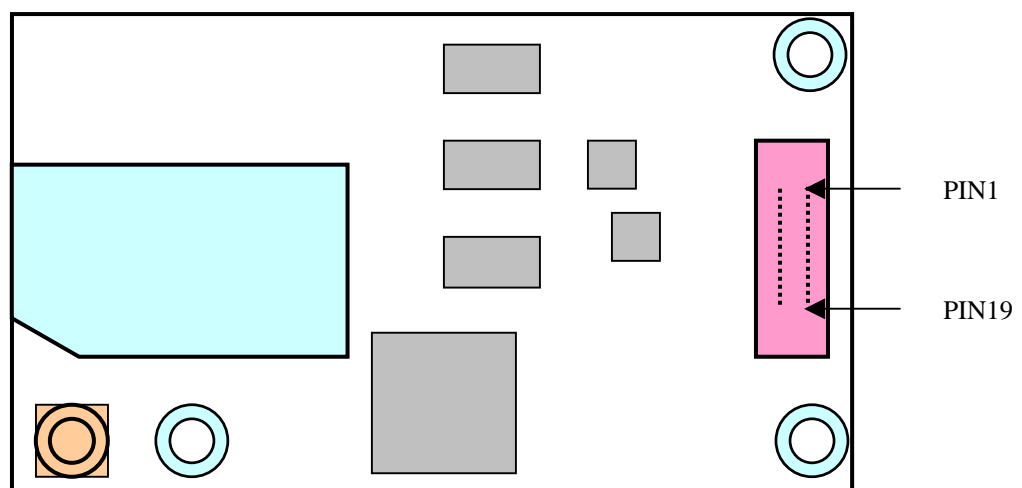


Figure : Top view

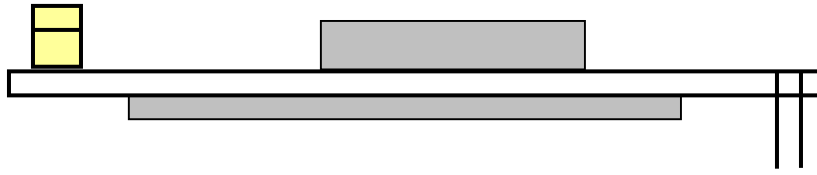


Figure : side view

- Connector : 20-pin 2.0mm pitch
- Antenna connector: MCX

2.2 The 20-pin connector

This connector consists of all signals, necessary for system integration. It consists of TXD and RXD signals, audio input/output, power supply and modem control signals.

Pin number	I/O type	Description
1	DCD	
2	RXD	Receive serial data, TTL level, output
3	TXD	Transmit serial data, TTL level, input
4	DTR	
5	GND	Ground, high current
6	DSR	
7	RTS	
8	CTS	
9	RI	
10	RESET	Input, modem reset control signal
11	SPEAKER2+	Speaker2, positive output
12	SIM_VCC	Output, SIM card supply voltage
13	SPEAKER2-	Speaker2, negative output
14	SIM_RESET	Output, SIM reset, 2X
15	MIC2+	Microphone2, positive input
16	SIM_CLK	Output, SIM clock, 2X
17	MIC2-	Microphone2 negative input
18	SIM_DATA	I/O , SIM data, COMS 3X
19	5V	Supply voltage
20	LED	Output, Working Indication

Signal description

2.2.1 Power supply:

Pin5 = Supply Ground.
Pin19 = Supply voltage 5VDC

Power supply design is an important factor. The GSM modem transmits in burst sequences, therefore the power supply must be able to deliver high current peaks in short period of time.

Supply voltage = 5V
Supply current = 1 amperes.

2.2.2 Serial link (TTL Level)

The 2 wire serial link due to 5V TTL level

- Pin 1 = DCD
- Pin 2 = RXD
- Pin 3 = TXD
- Pin 4 = DTR
- Pin 6 = DSR
- Pin 7 = RTS
- Pin 8 = CTS
- Pin 9 = RI

2.2.3 SIM interface


The modem controls a 3V SIM. 5V SIM can be implemented using an external SIM driver.

- Pin 12 = SIM_VCC
- Pin 14 = SIM_RESET
- Pin 16 = SIM_CLK
- Pin 18 = SIM_DATA

2.2.4 LED

Pin 20 = LED: The LED output can be used to drive a LED indicator via a transistor.


LED Status	Modem Status	
OFF	Modem in download mode or modem OFF	
ON	Permanent	Modem switched ON, not registered on the network
	Slow flash	Modem switched ON, registered on the network
	Quick flash	Modem switched ON, registered on the network, communication in progress



2.2.5 Audio


The Microphone-2 inputs are differential. They include the biasing for an electret microphone (0.5mA and 2V). The electret microphone's impedance has to be around 2KΩ and can be connected directly.

- Pin 15 = Microphone2 +
- Pin 17 = Microphone2 -



The Speaker2 outputs are push-pull amplifiers and can be loaded down to 150Ω and up to 1nF. These outputs are differential and the output power can be adjusted by 2dB steps.

- Pin 17 = Speaker2 +
- Pin 18 = Speaker2 -

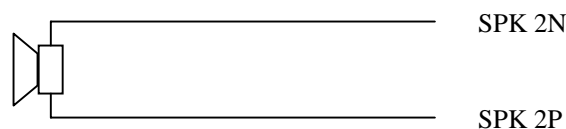

2.2.6 Control signals

Pin 10 = RESET input: This input is used to force a cold reset. It has to be driven by an open collector or open drain.

